

T60 SERIES TRUCK MOUNTED CONCRETE PUMP



The T60 truck mounted concrete pump has been specifically engineered to increase your productivity and most importantly, your profitability to ensure Jacon is the right partner for you.


The T60 Series comes with an option of 3 different Jacon pumps, providing the client with a range of options to suit their needs. The spraymaster may be used as a shotcrete machine suitable for jobs such as earth stabilisation and retaining walls. The T60 and T75 range in output capacities to provide a variety of concrete pumping services such as footings, concrete slabs, blockfilling, footpaths and driveways.

Containing the superbly engineered "S" valve, the T60 truck mounted concrete pump is capable of handling extremely harsh mixes as well as low slump concrete. With an output ranging from 30m³/hr – 75m³/hr, these compact and robust units can be utilised for many applications within the civil industry.


ROBUST AND RELIABLE, THIS MACHINE IS PURPOSE BUILT FOR TROUBLE FREE OPERATION




DIMENSIONS

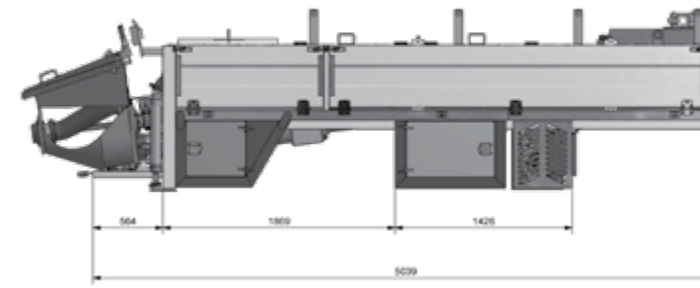

SIDE VIEW

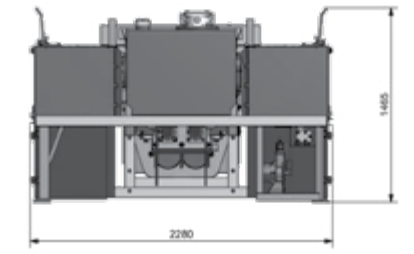

FRONT VIEW

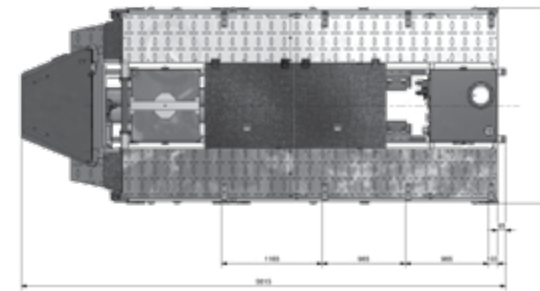

TOP VIEW

SPECIFICATIONS

	SPRAYMASTER	T60	T75
PUMP	160mm cylinders with 1100mm stroke	180mm cylinders with 1100mm stroke	180mm cylinders with 1500mm stroke
	S-Valve, swingtube design concrete transfer valve in hopper All cylinders are hard chromed		
POWER UNIT			
PTO	Standard	Standard	Standard
6 Cylinder Engine	Perkins1006	Perkins1006	N/A
HYDRAULIC PRESSURE MAX	300 Bar	300 Bar	300 Bar
RATED OUTPUT	30 Cubic Metres / Hour	60 Cubic Metres / Hour	75 Cubic Metres / Hour
LINE PRESSURE MAX	85 Bar	70 Bar	70 Bar
VERTICAL REACH	100 Metres	40 Metres	40 Metres
HORIZONTAL REACH	200 Metres	150 Metres	150 Metres

Aggregate size: *Up to 40mm that falls within the accepted grading curve for pump mix. | Note: *Performance may vary due to material mix or line set up.

FEATURES

- Water Pump with Stainless Steel Water Tanks
- Air Blow Out System
- Spot Light on Hopper
- Single Channel Cordless Remote System
- Variable Displacement Piston Pump
- Independent Hydraulic Circuit for Auxillaries
- Mounting to Truck Chassis
- Standard LED Road Lighting
- Drop Down Doors on Side of Unit

OPTIONAL EQUIPMENT

- 4 Channel Remote control
- Standard Pipeline Kit
- Blockfill Kit
- Bathtub style hopper c/w Remixer
- High pressure water pump
- Compressor for Spraymaster
- Spraying Kit

FURTHER SPECS / RECOMMENDATIONS

RECOMMENDED TRUCK

Isuzu FRR600 | 4.36 metre wheel base. 10,900 Kgs G.V.M.

Specifications subject to change without notice | For further equipment details contact info@jacon.com.au